




RESTORE-LITE[®]

TEMPORARY POWER RESTORATION

The Lever bypass adapter is designed to connect the Restore-Lite[®] meter head cord set to a 320-amp meter box.


Installation and operation of Lever Bypass Adapter:

P80069

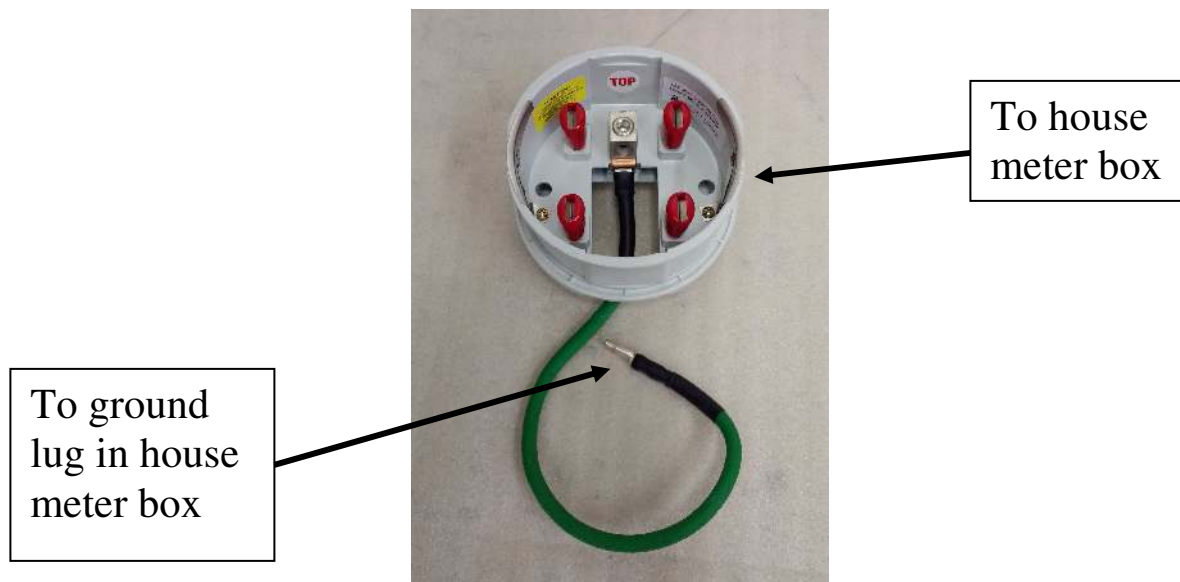

SNC Manufacturing Co., Inc
101 West Waukau Avenue, Oshkosh, WI 54902
800-558-3325 or 920-231-7370 * FAX 920-231-1090
Email: telecom@sncmfg.com
Website: www.sncmfg.com

1. Remove cover of service panel.
2. Operate lever bypass and remove the meter.

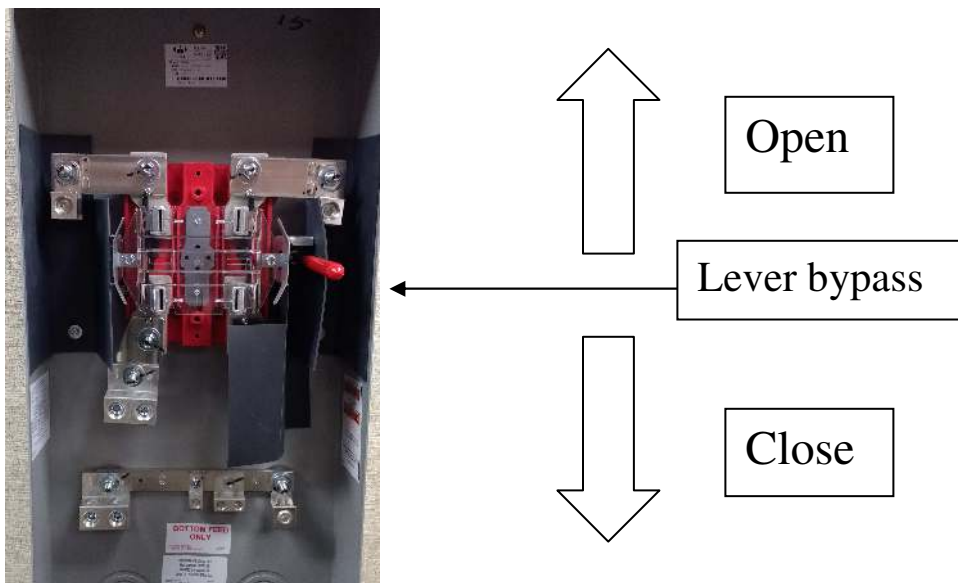

3. Install adapter and close bypass.



SNC Manufacturing Co., Inc
101 West Waukau Avenue, Oshkosh, WI 54902
800-558-3325 or 920-231-7370 * FAX 920-231-1090
Email: telecom@sncmfg.com
Website: www.sncmfg.com

4. Make neutral connection from adapter to ground/neutral lug.



5. Replace service panel cover.



SNC Manufacturing Co., Inc
101 West Waukau Avenue, Oshkosh, WI 54902
800-558-3325 or 920-231-7370 * FAX 920-231-1090
Email: telecom@sncmfg.com
Website: www.sncmfg.com

6. Make neutral connection between Restore-Lite[®] meter head cord set and adapter lug.



7. Plug Restore-Lite[®] meter head cord set into the adapter.



SNC Manufacturing Co., Inc
101 West Waukau Avenue, Oshkosh, WI 54902
800-558-3325 or 920-231-7370 * FAX 920-231-1090
Email: telecom@sncmfg.com
Website: www.sncmfg.com



Restore-Lite[®] meter head cord set and adapter ready for security ring installation.

8. Install meter security ring between the adapter and the Restore-Lite[®] meter head cord set, engage latches on base of meter head cord set into security ring.

9. Install meter and security ring.



SNC Manufacturing Co., Inc
101 West Waukau Avenue, Oshkosh, WI 54902
800-558-3325 or 920-231-7370 * FAX 920-231-1090
Email: telecom@sncmfg.com
Website: www.sncmfg.com